

## Declaration of Performance (DoP) - BYG0026-004

1. Unique identification code of the product-type:  
No.: **M153**  
**Isover Rulle 34, Regellängd 36, Bjälklagslängd 36,**
2. Intended use(s):  
**Thermal insulation for buildings**
3. Manufacturer:  
SAINT-GOBAIN Denmark A/S  
Robert Jacobsens Vej 62A  
2300 Copenhagen S  
CVR No.: 59983016  
Tel.: +45 72 17 17 17 • E-mail: [isover@isover.dk](mailto:isover@isover.dk) • Web: [www.isover.dk](http://www.isover.dk)
4. Not applicable
5. AVCP System 1, reaction to fire  
AVCP System 3, for other characteristics
6. The products are covered by the harmonised product standard EN 13162

Notified body: Dancert A/S, Gregersensvej 1, DK-2630 Taastrup, NB 1073, has performed the tasks of the notified body under AVCP System 1.

Notified testing laboratory: FORSCHUNGSINSTITUT FÜR WÄRMESCHUTZ E.V. MÜNCHEN (FIW), Lochhamer Schlag 4, DE-82166 Gräfelfing, FIW No. 0751, or  
Technological Institute, Gregersensvej 1, DK-2630 Taastrup, TI No. 1235, has carried out tests and issued test reports on the declared performance under AVCP System 3.

## 7. Declared performance: Mineral wool product standard EN 13162:2012 + A1:2015

Essential characteristics	Declared performance		
Reaction to fire (Euroclass)	A1		
Thermal performance	Thickness mm 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245	Thermal resistance (R) m <sup>2</sup> ·K/W 1,30 1,45 1,60 1,75 1,90 2,05 2,20 2,35 2,50 2,60 2,75 2,90 3,05 3,20 3,35 3,50 3,65 3,80 3,95 4,10 4,25 4,40 4,55 4,70 4,85 5,00 5,10 5,25 5,40 5,55 5,70 5,85 6,00 6,15 6,30 6,45 6,60 6,75 6,90 7,05 7,20	Thermal conductivity (λ) mW/m·K 34
Thickness class (T)	T2		
Compressive strength	NPD		
Point load (PL(5))	NPD		
Short-term water absorption (WS)	NPD		
Long-term water absorption (WLP)	NPD		
Water vapour diffusion resistance factor (MU)	MU1		
Dimensional stability	DS(70,90)		
Air flow resistivity (AFr)	≥ AFr10		
Sound absorption	NPD		
Release of dangerous substances	NPD		
Continuous glowing combustion	NPD		
Tensile strength perpendicular to faces (TR)	NPD		
Flexural strength (BS)	NPD		
Shear strength (SS)	NPD		
Compressive creep (CC)	NPD		

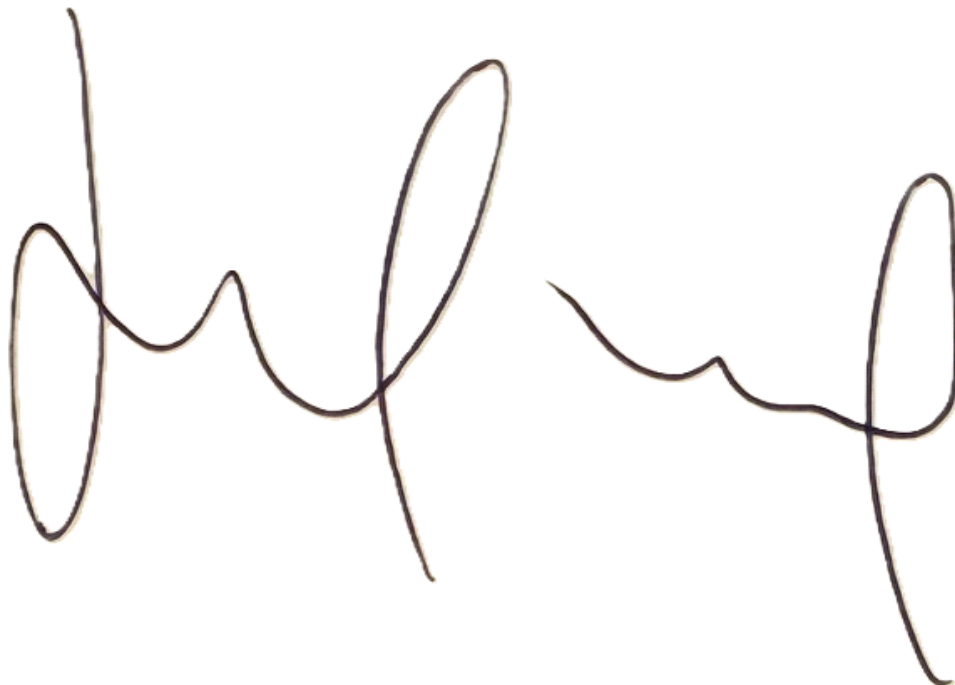
Dynamic stiffness (SD)	NPD		
Thickness under load (dL, dB)	NPD		
Compressibility (CP)	NPD		

NPD = No Performance Determined

8. The performance of the product identified above is in conformity with the declared performance.  
This declaration of performance is issued in accordance with Regulation (EU) No 305/2011 and SAINT-GOBAIN Denmark A/S – Isover is solely responsible for its content.

On behalf of the company  
Head of Product Management Daniel Odby

Vamdrup, on 01-01-2026

A handwritten signature in dark ink, consisting of several loops and a long horizontal stroke, positioned above a thin horizontal line.